



Better. Where It Counts.


Cummins 2013 ISL9 For RV Applications.
330 hp To 450 hp.



■ VGT™
Turbocharger

■ C Brake™
By Jacobs®

■ Cummins
Aftertreatment
System

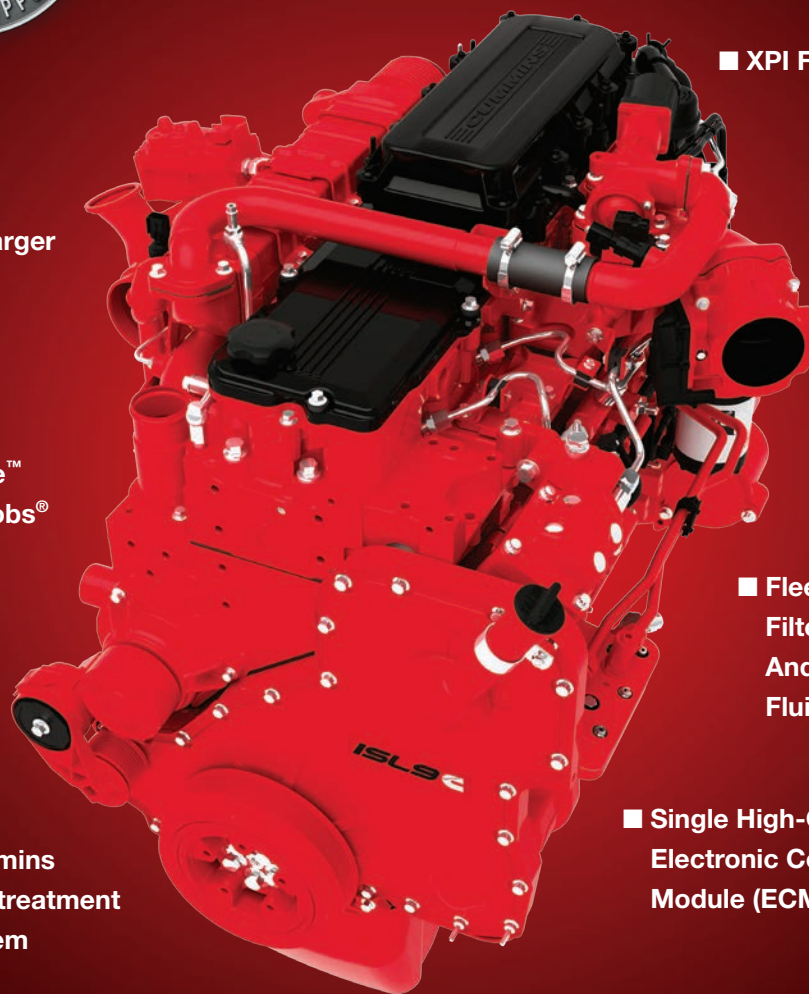

■ XPI Fuel System

■ Fleetguard® Fuel
Filters, Lube Filters
And Diesel Exhaust
Fluid (DEF)

■ Single High-Capacity
Electronic Control
Module (ECM)

Better Where It Counts. Cummins ISL9.


The ISL9 makes every journey as enjoyable as your destination, with the highest power-to-weight ratio of any engine in its class and the reliability you expect from a Cummins. Designed and developed as a totally integrated system, the ISL9 delivers:

- Up to 2 percent better fuel economy over previous models through optimization of the turbocharger and control system.
- Strong acceleration and towing capacity at every rpm with Cummins XPI fuel system.
- Smooth, quiet operation with multiple injection events every combustion cycle.
- Near-zero emissions with the proven Cummins Aftertreatment System, and On-Board Diagnostics to monitor and ensure clean operation.
- 5-year/100,000-mile (160,934 km) base warranty.

Better Customer Support. Every Hour.

Cummins has the largest and most capable parts and service network in North America. Our 3,500 certified service locations with qualified technicians and Genuine Cummins Parts ensure fast and accurate repairs. Call Cummins Care at 1-800-CUMMINS™ (1-800-286-6467), and you'll get 24/7/365 service location assistance from a Cummins Care representative.

Also, enjoy comfortable guest lounges, Internet access and complimentary overnight parking with electrical hookups at one of over 40 Coach Care™ facilities located near America's most popular RV destinations. Check out the Coach Care section at funroads.com.

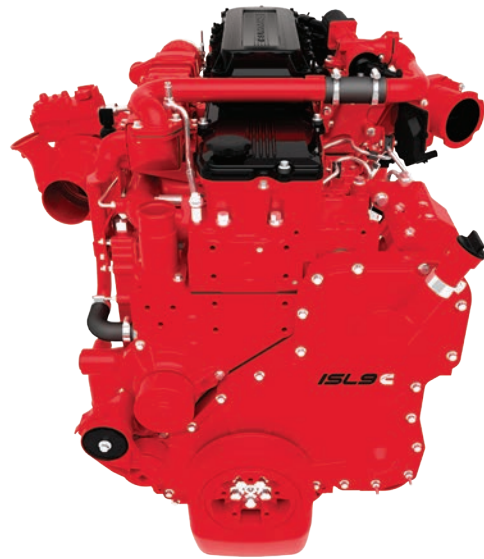

ISL9 Ratings

Engine Model	Advertised HP (kW)	Peak Torque LB-FT (N•M) @ RPM
ISL9 450	450 (335)	1250 (1695) @ 1400
ISL9 400	400 (298)	1250 (1695) @ 1400
ISL9 380	380 (283)	1150 (1559) @ 1400
ISL9 350	350 (261)	1000 (1356) @ 1400
ISL9 330	330 (246)	1000 (1356) @ 1400

ISL9 Specifications

Clutch Engagement Torque	575 lb-ft	780 N•m
Number of Cylinders	6	
Biodiesel Compatibility	Up to B20	
System Weight (Dry)	1,912 lb	867 kg

ISL9 Maintenance Intervals

Maintenance Item	Miles/Kilometers	Months
Oil and Filter	20,000 mi 32,000 km	12
Fuel Filter	20,000 mi 32,000 km	12
Coolant Filter	15,000 mi 24,000 km	6
Standard Coolant Change	80,000 mi 128,000 km	24
Valve Adjustment	150,000 mi 240,000 km	48
Coalescing Filter	Every 3rd to 4th Oil Change Interval	
DEF Filter	200,000 mi 320,000 km	
Diesel Particulate Filter	200,000 mi 320,000 km	

Consult QuickServe® Online (quickserve.cummins.com) or your Owners Manual for the most accurate and up-to-date information.



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

Phone: 1-800-CUMMINS™ (1-800-286-6467)
Internet: cumminsengines.com

Twitter.com/CumminsEngines
YouTube.com/CumminsEngines

Bulletin 4971464 Printed in U.S.A. Rev. 8/17
©2017 Cummins Inc.