



# Better Every™ Call.

ISB6.7 For EPA 2010.

For Fire And Emergency Applications.


■ Cooled Exhaust  
Gas Recirculation (EGR)

■ High Pressure  
Common Rail (HPCR)  
Fuel System

■ Variable Geometry  
Turbocharger

■ Fully Integrated  
Electronic Controls

■ Cummins  
Aftertreatment  
System

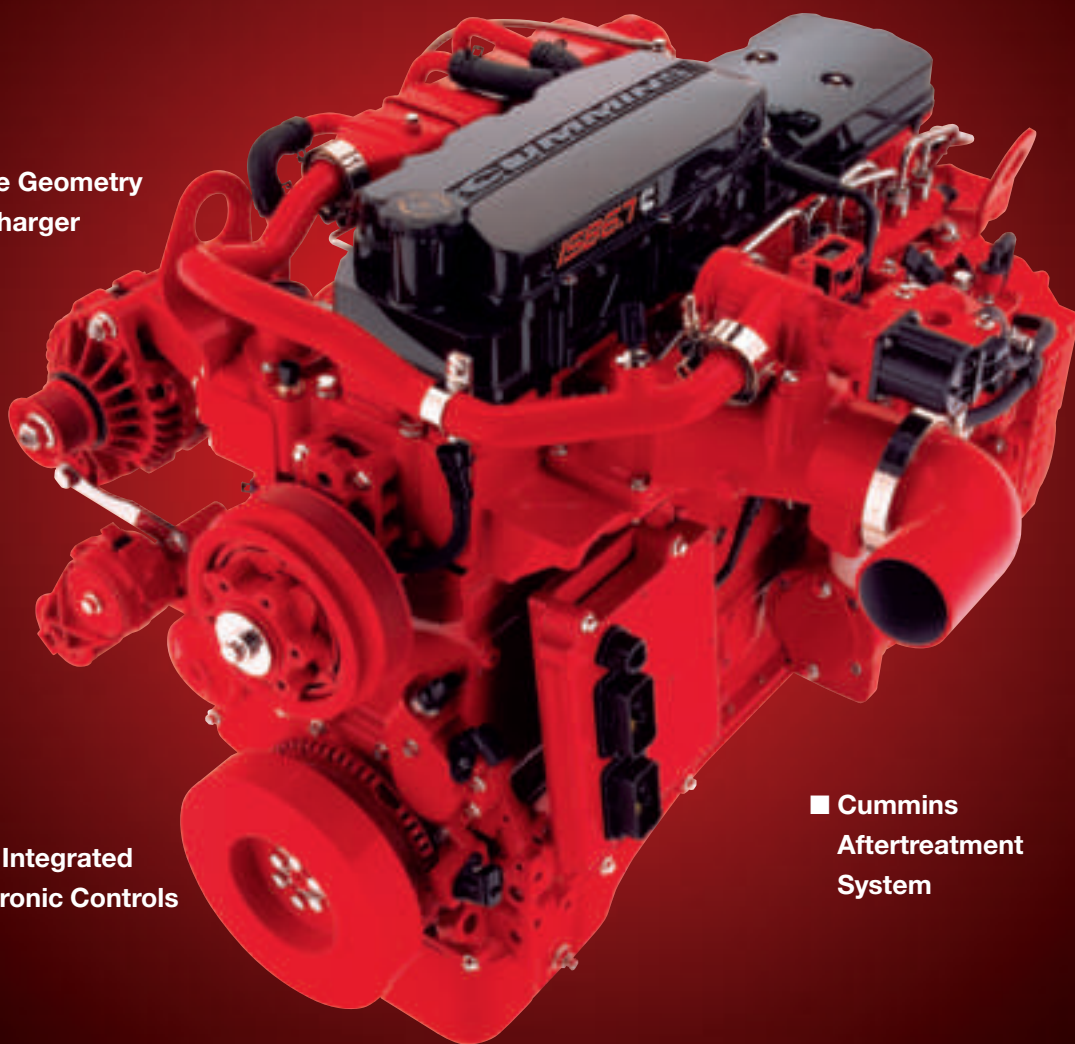

# Proven Power. Every™ Call. ISB6.7 For EPA 2010.

For superior performance at every rpm, Cummins ISB6.7 EPA 2010 is best-in-class. Its High Pressure Common Rail (HPCR) fuel system delivers an optimum balance of performance, emissions control and fuel economy across the entire operating range.

The ISB6.7 incorporates a fully integrated aftertreatment system that combines cooled EGR with proven Selective Catalytic Reduction (SCR) technology. This proven technology delivers near-zero emissions, while getting more power out of every drop of fuel.

From the reliability and durability you've come to expect from a Cummins B Series engine to the power and efficiency of our latest technology, the ISB6.7 delivers it all. Every call.

**VGT™ Turbocharger** – The Cummins VGT Turbocharger is both simple and precise. Electric actuation allows infinite adjustment, providing the exact amount of boost necessary for superior response. The proven sliding-nozzle design has best-in-class reliability and durability.

**HPCR Fuel System** – The HPCR fuel system delivers a precise mixture of fuel and air at a constant pressure, regardless of engine rpm. This flexibility in injection timing allows multiple injection events per cycle, which maximizes fuel economy and performance while decreasing noise and exhaust emissions.

**Cooled EGR** – This next-generation system lowers combustion temperatures for reduced emissions and optimized fuel economy.

**Fully Integrated Electronic Controls** – A single higher-capacity Electronic Control Module (ECM) controls everything from air intake to exhaust aftertreatment for peak performance and near-zero emissions.

**Cummins Aftertreatment System** – The proven Cummins Particulate Filter reduces particulate matter by over 90%. In 2010 it is combined with Cummins SCR to meet emissions standards while maintaining best-in-class performance, reliability and durability. Cummins SCR technology has been proven in over 200,000 European vehicles and uses Diesel Exhaust Fluid (DEF) to achieve NOx emissions at near-zero levels. DEF will be readily available; reference Cummins Filtration flyer LT15618 for more information.

Cummins is a pioneer in product improvement. Thus, specifications may change without notice. Illustrations may include optional equipment.



## ISB6.7 Specifications

Advertised Horsepower	260-360 HP	194-269 kW
Peak Torque	660-800 LB-FT	895-1085 N•M
Governed Speed	2600 RPM (2800 RPM for 340-HP rating)	
Clutch Engagement Torque	400 LB-FT	542 N•M
Number of Cylinders	6	
Oil System Capacity	4 U.S. GALLONS	15 LITERS
System Weight	1,340 LB	608 KG
Engine (Dry)	1,150 LB	522 KG
Aftertreatment System*	190 LB	86 KG

\*Increase over standard muffler and does not include chassis OEM-supplied components.

## ISB6.7 Maintenance Intervals

Maintenance Item	Miles/Kilometers	Hours	Months
Oil and Filter*	15,000 MI 24,000 KM	500	6
Primary Fuel Filter**	15,000 MI 24,000 KM	500	6
Secondary Fuel Filter	15,000 MI 24,000 KM	500	6
Coolant Filter	None***	None***	None***
Overhead Adjustment	150,000 MI 241,500 KM	5,000	48
Standard Coolant Change****	60,000 MI 96,000 KM	2,000	24
Coalescing Filter	Every 3rd to 4th Oil Change Interval		
DEF Filter	200,000 MI (320,000 KM)		
Particulate Filter Cleaning	200,000 MI (320,000 KM) or 6,500 Hours		

\*Assuming normal duty cycle for fire/emergency vehicle applications and 14.2-liter (15 qt) capacity lubricating oil pan.

\*\*OEM-supplied; intervals may vary.

\*\*\*If engine is equipped with an optional coolant filter, it will need to be replaced at the same intervals as the oil filter.

\*\*\*\*Extended coolant and drain/flush/fill intervals may be followed when certain requirements are met. For more information on these requirements, refer to the Cummins Coolant Requirements and Maintenance Service, Bulletin 3666132.



Cummins Inc.  
Box 3005  
Columbus, IN 47202-3005  
U.S.A.

Phone: 1-800-DIESELS (1-800-343-7357)  
Fax: 1-800-232-6393  
Internet: everytime.cummins.com

Bulletin 4971208 Printed in U.S.A. 4/09  
©2009 Cummins Inc.